

Baron

Steel Doors & Frames

ASSA ABLOY

Baron Door and Frame Service Center Program

Your One Stop for Service and Value



ASSA ABLOY, the global leader
in door opening solutions

Baron

Steel Doors & Frames

ASSA ABLOY

Door Series

Baron's complete line of steel doors for commercial, institutional and industrial applications satisfies your requirements durability, security, aesthetics or fire protection. Stocked at the South Central Service Center with Steelcraft locations, these doors are cold rolled or galvanized and prime painted at the price you need.

Available Features:

- Gauge: 18 gauge cold rolled steel standard;
18 gauge galvanized available
- Core: Standard / Polystyrene
- Listing: 3 Hour fire rating (18 gauge) standard (ITS/WHI)
- Sizes: From 2'6" x 6'8" to 4'0" x 8'0"
- Options: Available with a wide range of glass lights, louvers, and hardware preps
- Hinge Location: Steelcraft locations (39-9/16" strike center line)

Door Construction:

Inverted Top and Bottom Channels for additional stability and protection

Interlocking Seam enhances structural rigidity and durability

Heavy Gauge Closer Reinforcement in all doors exceeds the Steel Door Institute recommendations

Hinge reinforcements with dimpled construction provides easy conversion from standard weight to heavy weight hinges

Code Compliance and Physical Performance:

Level 'A' grade in tested in accordance with ANSI A250.4 test procedures

Meets or exceeds ANSI/SDI A250.6

Meets the requirements of ANSI A250.8

Listed for fire door installations requiring positive or negative pressure testing (UBC-7-2-97, UL10B, and UL 10C) in sizes to 4080 singles and 8080 pairs





Frame Series

Baron steel frames are manufactured to provide value to any job regardless of size. Stocked at the South Central Service Center with Steelcraft locations, our drywall frames are cold rolled. Standard for masonry frames are galvenneal. Both are prime painted at the price you demand.



Features:

- Gauge: 16
- Profiles: Masonry-Standard Profile (A40 galvenneal)
Drywall - Cold Rolled Steel
- Strike Prep: 4-7/8"
- Anchors: Wood Stud, Steel Stud, Masonry, Existing Openings
- Hinge Location: Steelcraft locations (39-9/16" strike center line)
- Unequal rabbet design
- Prime Painted
- Non-handed
- Flush top cap standard

Frame Construction:

- Depth: Masonry: 5-3/4", 7-3/4", 8-3/4" Standard
Drywall: 5-5/8", 5-7/8", 7-1/8", 8-1/4"
4-3/4" Available factory lead-times
- Jamb: 6'8", 7'0", 8'0"
- Head: 2'0", 2'4", 2'6", 2'8", 3'0", 3'4", 3'6", 3'8", 4'0", 6'0"
- Face: 2", 4"

Knock Down for easy installation
Service Center welding available if needed

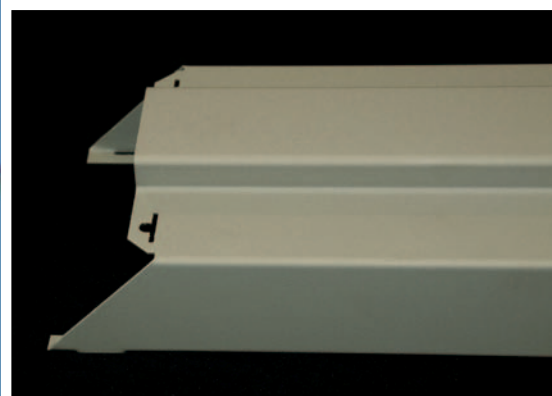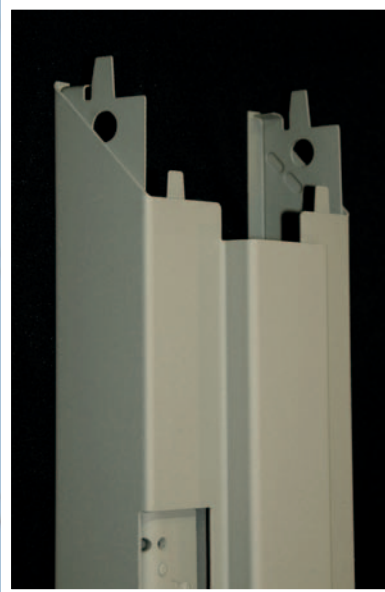

4-3/4", 6-1/4", 6-3/4", 7-1/8", 8-1/4"
Masonry jamb depths available
Factory lead-times

ASSA ABLOY South Central Service Center



The South Central Team

Joe Poborsky
General Manager

Marvin Bull
Customer Service/Product Specialist

Renee Sutherland
One Source Customer Service

Mindy Adams
Inside Assistant

Phone: (972) 272-0271
Fax: (972) 272-7829

Service Center Capabilities

- Custom frame capabilities
- Large welding and fabrication capabilities
- Quick Ship manufacturing capabilities
- 1-3 day turnaround on stock/pull shop orders
- Special crating and packaging
- Custom modifications to doors and frames
- Borrowed lites and sidelites
- Large metal stock inventory
- Licensed with Underwriters Laboratories with Warnock Hersey procedures
- Next day shipping zones

ASSA ABLOY South Central Service Center
2855 Marquis, Suite 190 • Garland, TX 75042
Phone: 972-272-0271
Fax orders to: 972-272-7829

Office Business Hours :
(Eastern Time)

Monday thru Friday
7:30 am - Noon
12:30 pm - 4:00 pm

Shipping, Receiving and Shop Hours:

Monday thru Friday
7:30 am - 3:00 pm

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

Copyright © 2009 Baron Metal Industries Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express permission of Baron Metal Industries is prohibited.